GT210 Fingerprint Access Control and Time Attendance Terminal

Wi-Fi

GPRS

Battery

Introduction

The GT210 is one of the intelligent fingerprint access control device of new generation, support both network and standalone. GPRS/Wi-Fi makes communication with PC easier. USB flash drive for offline data management. Built-in battery backup provides approx 4-5 hours to operate.

Basic Feature

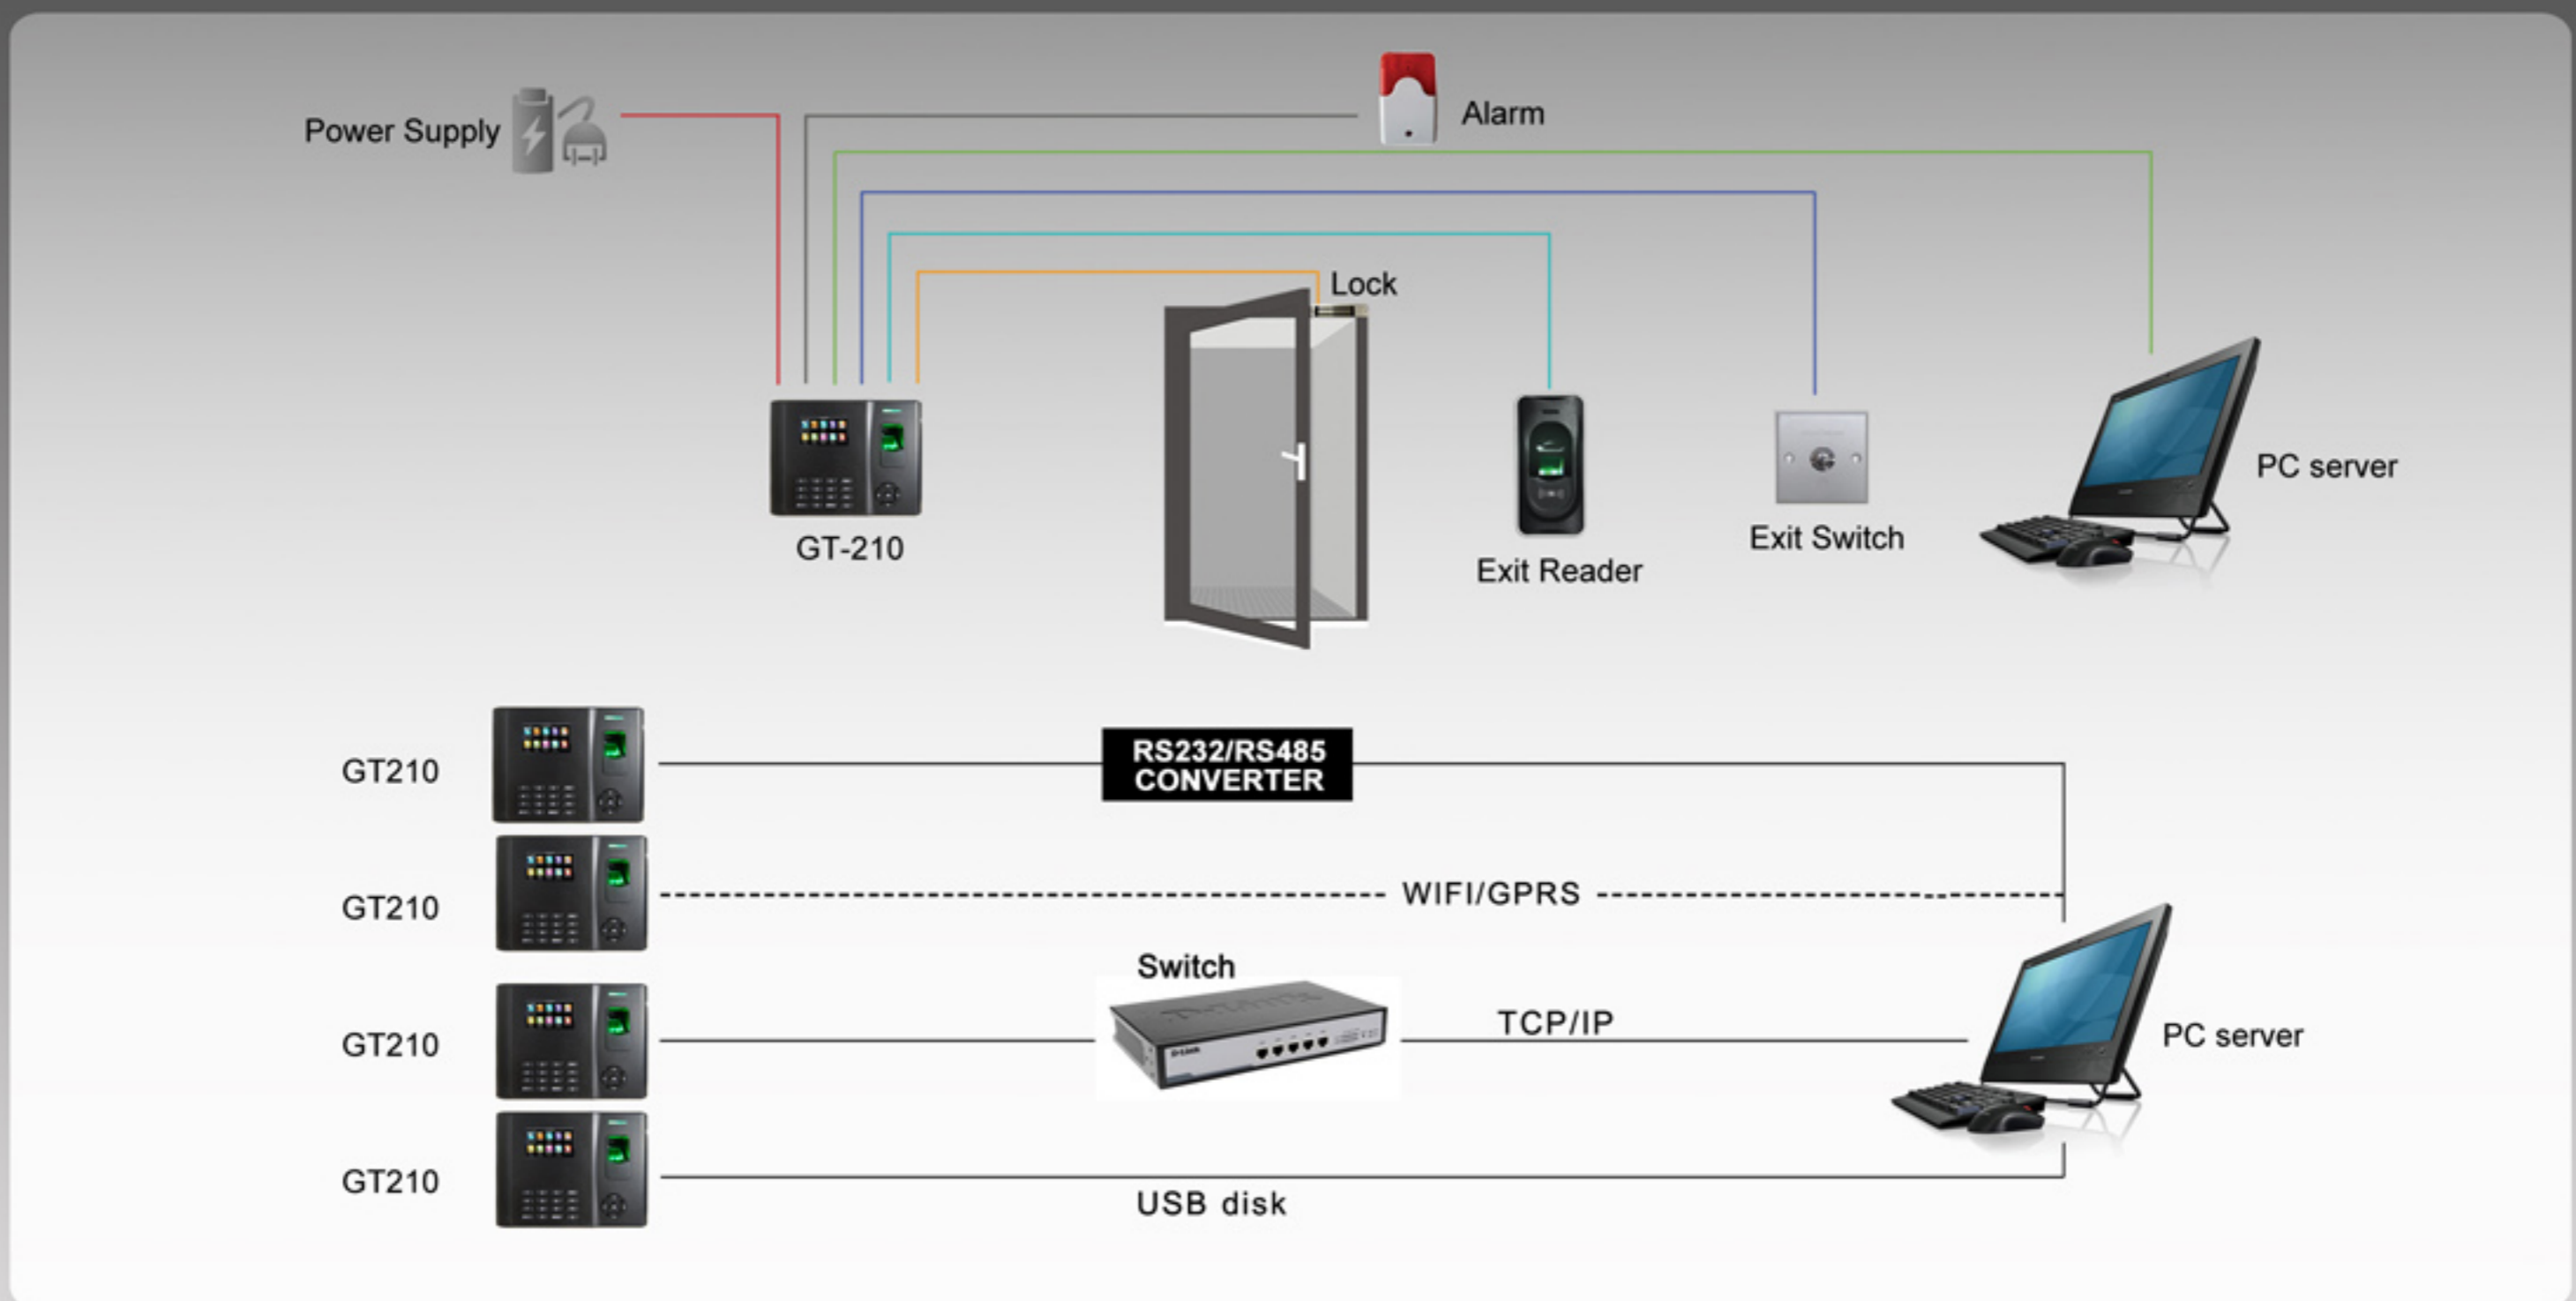| 3"Color screen | Photo ID | T9 Input | Workcode | Webserver | SMS | Schedule bell |

Distinctive Function

- Easy to integrate into various system
- Standalone or network environment
- Built-in backup battery provides approx. 4-5 hours

- Saves data during power outage
- New algorithm system with high speed operating

Working Application

Specification

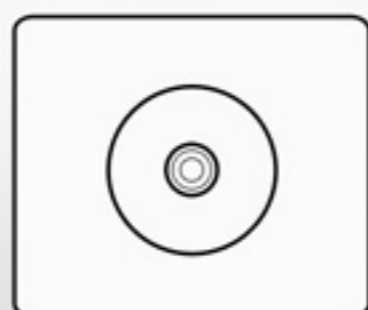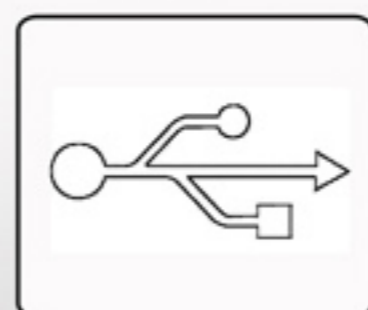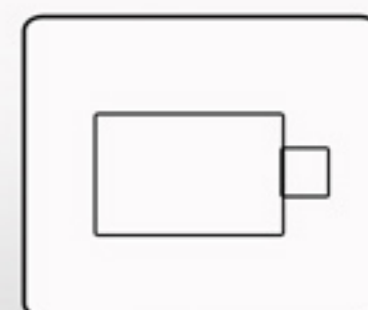|	
Model	**Language**
GT210	Multi language, English, French, Spanish, Arabic, etc.
Display/Speaker	**Attendance status**
LCD Display: 3" TFT screen	Check in, Check out, Break in, Break out, Overtime in, Overtime out
Speaker: Voice Prompt (language can be selected)	**Wiegand Signal**
Environment	In and out
Operation temperature: 0°C-45°C	**Access Control**
Operation humidity:20%-80%	Built-in relay, support 99 time zones, 5 group, 10 door-opening combinations
Technical	**Alarm**
Fingerprint capacity: 3,000	Dismantlement alarm, break-in alarm, duress alarm
Specifications Capacity	**Functions Support**
Log capacity: 100,000	Workcode, DLST, Auto-status, T9 input, 9 dight user ID, Scheduled-bell
Verification/Identification	SMS, Self-service Query, Photo-ID
Verification speed(1:1)<=0.5s	**Customize Function**
Identification speed(1:N)<=1S	Print function, 9 PIN user ID, ID/Mifare/HID card readerWi-Fi, ADMS
FRR<=0.01%, FAR<=0.0001%	GPRS, external siren
Communication	**Packing data**
TCP/IP, USB Host/Client, RS232/485	Machine size: 210(L)*157(W)*50(H)mm
Power Supply	Unit Packing: 270(L)*235(W)*90(H)mm
110/220VAC-12VDC/1.5A, Li-battery 7.4V 2000mAh	Real Weight: 1KG Gross weight:1.5KG

Package List
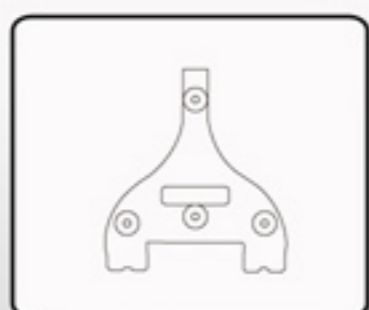
| Device | Back Plate | Screws | Software CD | USB Cable | Power Adapter | Li-Battery |