


SKETCH DIAGRAM

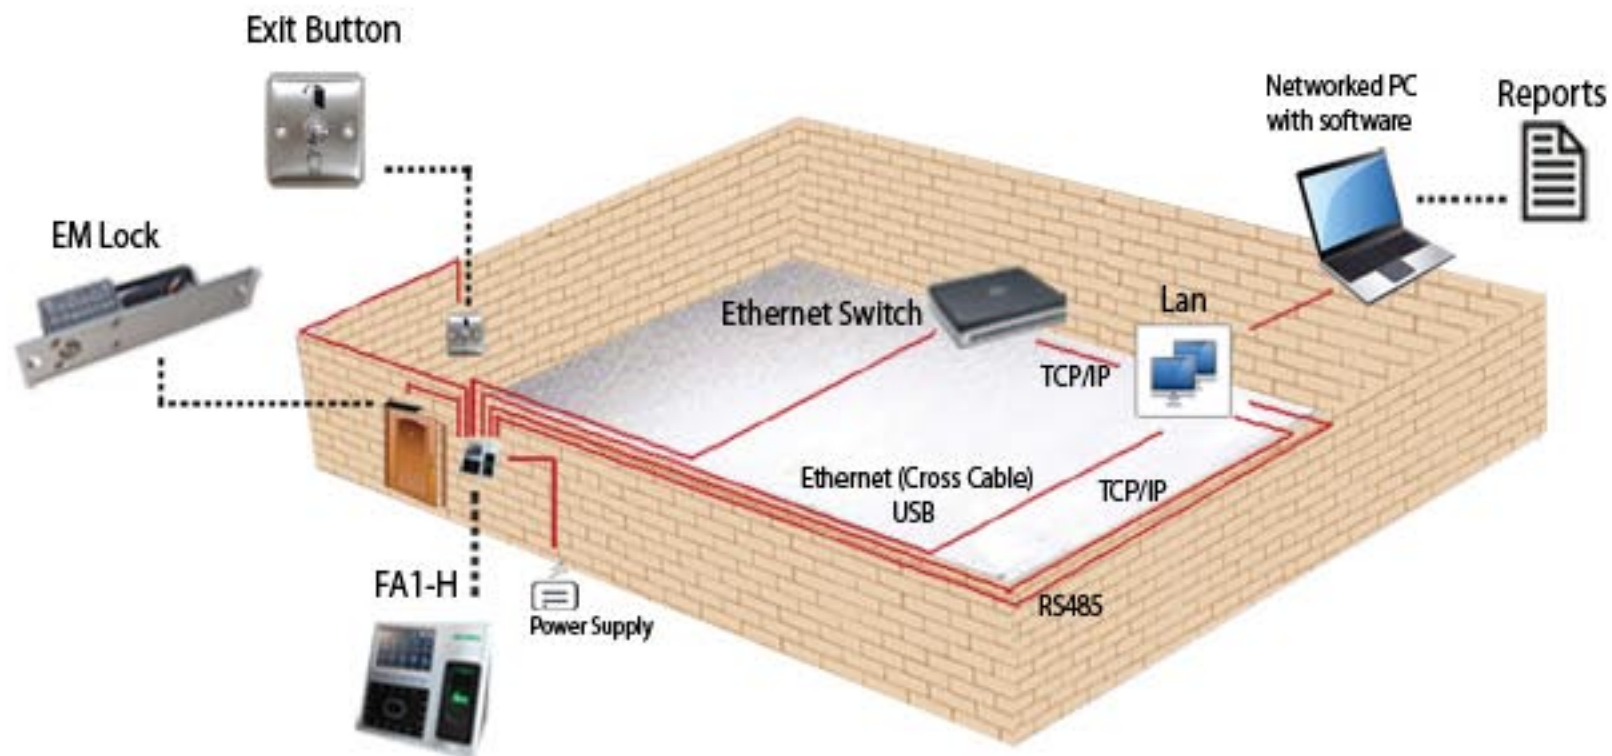

SPECIFICATION

Iface802

LCD Display

4.3" TFT Touch Screen

Speaker

Voice prompt (language can be selected)

Capacity

Face: 1200(1:N)

Fingerprint: 2,000

Logs: 100,000

Verification

Verification speed (1:1) $\leq 0.5s$

Identification speed (1:1) $\leq 1s$

Identification

FRR $\leq 0.01\%$ FAR $\leq 0.0001\%$

Attendance status

Check in/out, break in/out, OT in/out

Communications

TCP/IP, RS232/485, USB Hostx2

Access control

Built-in relay, Door Sensor, Wiegand out

Cameras

High Definition Infrared Cameras

Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

Environment

Operation temperature: $0^{\circ}C-45^{\circ}C$ Operation humidity: 20%-80%

Memory

256M flash, 64 SDRAM

Power Supply

110/220 VAC-12VDC 3A

Package info.

Machine size: 19.4(L)*16.5(W)*86(H)cm Unit packing: 31*26*12cm
Carton packing: 50*34*38cm Real weight: 1.6kg Volume weight: 2.0kg

Function support

Scheduled bell; DLST; Self-inquiry; Workcode; SMS; T9 input; Multi-alarm; Photo ID

Customize Function

Wifi; GPRS; Printer support; Webserver; Li-battery